



Spectrum Compact Series

Spectrum Analyzers 300 MHz to 87 GHz
and Signal Generators 6 GHz to 40 GHz



- Essential tool for interference detection, site survey, and path alignment
- Market leading receiver sensitivity: -105 dB at 1MHz RBW
- Instant On/Off functionality with simple, intuitive controls
- Stand-alone tool, no external controller required
- Included PC software for post-measurement analysis and reporting
- Resistive LCD touchscreen allows working with gloves on
- World's smallest mmWave spectrum analyzer designed specifically for comfortable outdoor use in a variety of challenging environments

DISTRIBUTOR : cc-globaltech
535 US 130, Hamilton, NJ 08620
Phone: (609) 529-8664

Toll Free: (888) 530-9009
www.cc-globaltech.com

Spectrum Analyzers Key Characteristics



JOSSAP10
JOSSAP11
JOSSAP12
JOSSAP13

P/N	JOSSAP33	JOSSAP13	JOSSAP14	JOSSAP60	JOSSAP80
Frequency range	0.300 - 3.000 GHz	2.000 - 8.000 GHz; 5.925 - 12.000 GHz; 10.000 - 18.000 GHz; 17.000 - 24.300 GHz	24.000 - 40.000 GHz	56.000 - 67.000 GHz	70.000 - 87.000 GHz
Input power range	-125 dBm to +20 dBm	-105 to -40 dBm	-105 to -40 dBm	-90 to -40 dBm	-90 to -30 dBm
Max input power	30 dBm	0 dBm	0 dBm	0 dBm	0 dBm
RBW	30, 100, 300 kHz	1 MHz	1 MHz	10 MHz	10 MHz
VBW	3, 10, 30, 100, 300 kHz	300 kHz	300 kHz	300 kHz	300 kHz
Min. Span	3 MHz	100 MHz	100 MHz	1 GHz	1 GHz
Max. Span	full bandwidth	full bandwidth	full bandwidth	full bandwidth	full bandwidth
Sweep speed	0.5s @ 30 MHz Span	0.5s @ Min. Span	0.5s @ Min. Span	0.5s @ 1 GHz Span	0.5s @ 1 GHz Span
Accuracy*	+/- 3 dB	+/- 1 dB	+/- 1 dB	+/- 1 dB	+/- 1 dB
Input	50 ohm SMA (f)	50 ohm SMA (f)	50 ohm 2.92 mm (f)	WR 15	WR 12
Interface	USB Type-C	mini USB 2.0 (1.1)	mini USB 2.0 (1.1)	mini USB 2.0 (1.1)	mini USB 2.0 (1.1)
Battery life	up to 3h	up to 4h	up to 4h	up to 3h	up to 3h
Operating temperature	-15°C to +40°C / 5°F to 104°F	-15°C to +55°C / 5°F to 131°F	-15°C to +55°C / 5°F to 131°F	-15°C to +55°C / 5°F to 131°F	-15°C to +55°C / 5°F to 131°F
Dimensions	135 x 83 x 34 mm / 5.31 x 3.27 x 1.34 in	128 x 81 x 24 mm / 5.04 x 3.2 x 0.94 in	128 x 81 x 24 mm / 5.04 x 3.2 x 0.94 in	147 x 83 x 34 mm / 5.79 x 3.27 x 1.34 in	147 x 83 x 34 mm / 5.79 x 3.27 x 1.34 in
Weight	0.5 kg / 17.6 oz	0.3 kg / 10.6 oz	0.4 kg / 14.11 oz	0.57 kg / 20.11 oz	0.57 kg / 20.11 oz

* Guaranteed at 21°C/70°F CW signal



Antenna kit in a ruggedized transport case



Tripod for horn antenna
3 GHz - 40 GHz



Spectrum Compact kit with ruggedized WG to SMA adapters, RF cable, attenuators

DISTRIBUTOR : cc-globaltech
535 US 130, Hamilton, NJ 08620
Phone: (609) 529-8664

Toll Free: (888) 530-9009
www.cc-globaltech.com

Signal Generator Key Characteristics



P/N	JOSSAG11	JOSSAG12	JOSSAG13	JOSSAG14
Frequency range	5.925 - 12.000 GHz	10.000 - 18.000 GHz	17.000 - 24.300 GHz	24.000 - 40.000 GHz
Output power range	-3 dBm to +13 dBm	-3 dBm to +11 dBm	-3 dBm to +10 dBm	-3 dBm to +5 dBm
Frequency accuracy		+/- 10 ppm		+/- 10 ppm
Phase noise		< -80dBc/Hz @100kHz		< -80dBc/Hz @100kHz
Adjustable frequency step		1 MHz		1 MHz
Adjustable power step		1 dBm		1 dBm
Signal form		Continuous wave		Continuous wave
Accuracy*		+/- 1 dBm		+/- 1 dBm
Output		50 ohm SMA (f)		50 ohm 2.92mm (f)
Interface		mini USB 2.0 (1.1)		mini USB 2.0 (1.1)
Battery life		up tp 4h		up to 3h
Operating temperature		-15°C to +55°C / 5°F to 131°F		-15°C to +55°C / 5°F to 131°F
Dimensions		128 x 81 x 24 mm / 5.04 x 3.2 x 0.94 in		130 x 81 x 28 mm / 5.11 x 3.2 x 1.1 in
Weight		0.3 kg / 10.6 oz		0.4 kg / 14.11 oz

* Guaranteed throughout all the temperature range

Available Accessories



Extension stick for near side radio measurements



0.17m 38dBi antenna



Attenuator kit, 60 dB



Waveguide adapters, 3 GHz - 40 GHz




40 GHz RF cable with thumbscrews




20dBi mmWave antenna

DISTRIBUTOR : cc-globaltech
 535 US 130, Hamilton, NJ 08620
 Phone: (609) 529-8664


Toll Free: (888) 530-9009
www.cc-globaltech.com

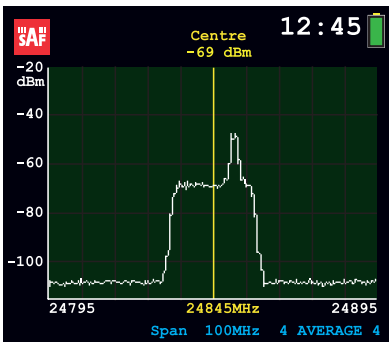


Easy In band, out of band, co-channel, adjacent channel interference detection

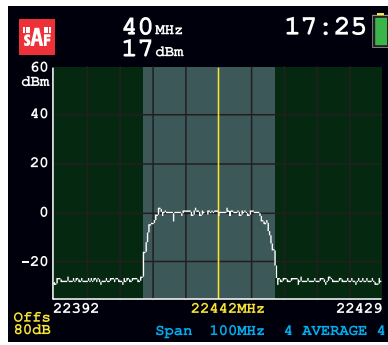


Power In Band function for signal power measurements

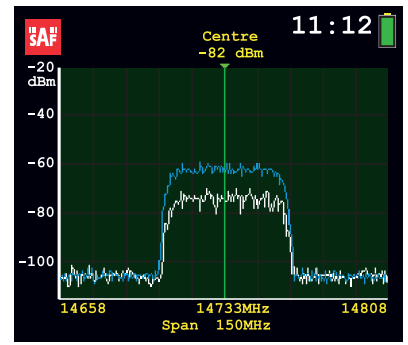


Max Hold Trace mode guaranties precise antenna alignment on main lobe

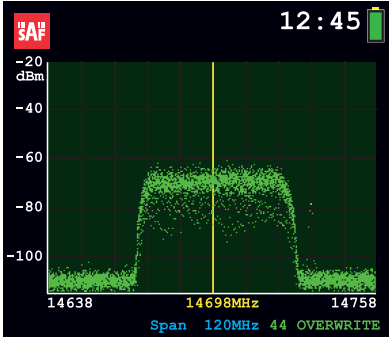

Overwrite function allows easy Multipath detection

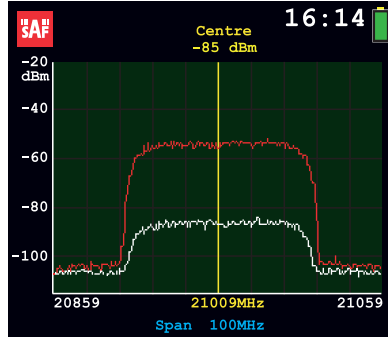

Use previously saved file as reference for real-time radio signal comparison

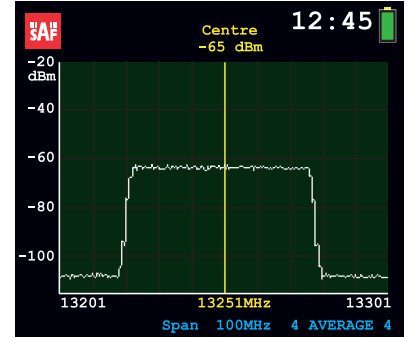

Verify radio signal according to radio configuration and specification



For more detailed information about SAF Tehnika products visit www.saftehnika.com or contact your SAF Tehnika representative info@saftehnika.com
 Product features may vary between different models and configurations. They are subject to change without prior notice.

SAF Tehnika © 2018

DISTRIBUTOR : cc-globaltech
 535 US 130, Hamilton, NJ 08620
 Phone: (609) 529-8664

Toll Free: (888) 530-9009
www.cc-globaltech.com