


S0342C

4-Channel PXIe Precision Source Meter

Version 1.2



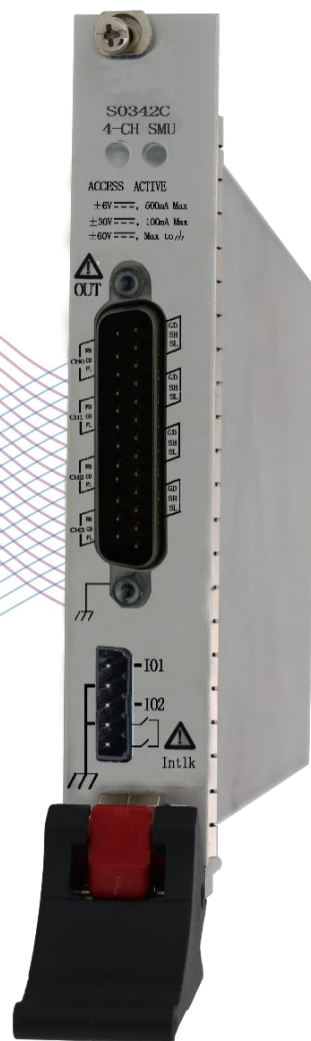

Product Description

The S0342C Precision source meter is compact and cost-effective 4-Channel PXIe Source/Measure Units (SMUs) with the capability to source and measure both voltage and current. They have Maximum ± 30 V, ± 500 mA DC sourcing capability, supports conventional SMU SCPI commands for easy test code migration. Support Most of standards PXIe chassis, support multi-card synchronization, these features improve efficiency and lower the cost of ownership when integrating the SMUs into systems for production test.

Key Features

Feature	Benefit
Integrated 4-quadrant sourcing and measuring capabilities	Easily and accurately measure current and voltage using a single Card without the need to manually change any connections
Measurement range: ± 30 V, ± 500 mA (DC)	Easily LIV sweep test with single Card
Source and measurement resolution down to 100 pA and 100 μ V	Can make low-level measurements using a low-cost High-density PXIe SMU that were previously only possible using a more expensive semiconductor device analyzer
Fast measurement	Up to 1M ADC sampling rate, NPLC and sampling rate optional setting
Free quick V/I control software	Can make measurements remotely from a PC without the need to program
Supports both conventional and default SCPI commands	Conventional SCPI commands provide some compatibility with older SMU code (such as Keithley 2400 series) to minimize code conversion work
Standard PXIe Module, Applicable to PXIe chassis	Easily expand to multi-channel and integration into rack and stack systems

Technical Specification

Specification conditions

Temperature : $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$

Humidity : 30% to 70% RH

Calibration period: 1 Year

Measurement speed: 1PLC (power line cycle)

After 60 minutes warm-up, ambient temperature changes less than $\pm 3^{\circ}\text{C}$

Voltage Source specifications

Voltage Programming accuracy	Range	Programming resolution	Accuracy (1 Year) \pm (% reading+ offset)	Typical Noise (RMS) 0.1 Hz-10Hz
	± 30 V	500 μ V	0.03%+4 mV	1000 μ V
	± 6 V	100 μ V	0.03%+1 mV	100 μ V
Temperature coefficient	$\pm(0.15 \times \text{accuracy})/^{\circ}\text{C}$ (0°C - 18°C , 28°C - 50°C)			
Channel ¹	CH0 to CH3			
Maximum output power per channel	3W: ± 30 V@0.1A, ± 6 V@0.5A			
Settling time	<200 μ s (typical)			
Overshoot	< $\pm 0.1\%$ (Typical.Normal.Step is 10 % to 90 % range, full range,resistive load)			



Noise 10Hz-20MHz	6V voltage source, 0.5A resistive load, <3mV RMS
------------------	--

1, Channels are isolated from earth ground but share a common LO.

Current Source specifications

Current Programming accuracy	Range	Programming resolution	Accuracy (1 Year) \pm (% reading+ offset)	Typical Noise (RMS) 0.1 Hz-10Hz
	± 500 mA ¹	10 μ A	0.05% + 100 μ A	10 μ A
	± 100 mA	2 μ A	0.05% + 10 μ A	1 μ A
	± 10 mA	200 nA	0.05% + 5 μ A	100 nA
	± 1 mA	20 nA	0.05% + 500 nA	10 nA
	± 100 μ A	2 nA	0.05% + 50 nA	1 nA
	± 10 μ A	200 pA	0.05% + 20 nA	150 pA
Temperature coefficient	$\pm(0.15 \times \text{accuracy})/^{\circ}\text{C}$ (0 $^{\circ}\text{C}$ -18 $^{\circ}\text{C}$,28 $^{\circ}\text{C}$ -50 $^{\circ}\text{C}$)			
Channel ²	CH0 to CH3			
Maximum output power per channel	3W: $\pm 30\text{V}@0.1\text{A}$, $\pm 6\text{V}@0.5\text{A}$			
Settling time	<300 μ s (typical)			
Overshoot	< $\pm 0.1\%$ (Typical.Normal.Step is 10 % to 90 % range, full range, resistive load)			

1,500mA range is available only for 6V voltage range

2, Channels are isolated from earth ground but share a common LO.

Voltage Measurement specifications

Voltage Measurement accuracy	Range	Measurement resolution	Accuracy (1 Year) \pm (% reading+ offset)
	$\pm 30\text{V}$	1mV	0.03%+4 mV
	$\pm 6\text{V}$	100 μ V	0.03%+1 mV
Temperature coefficient	$\pm(0.15 \times \text{accuracy})/^{\circ}\text{C}$ (0 $^{\circ}\text{C}$ -18 $^{\circ}\text{C}$,28 $^{\circ}\text{C}$ -50 $^{\circ}\text{C}$)		


Current Measurement specifications

Current Measurement accuracy	Range	Measurement resolution	Accuracy (1 Year) \pm (% reading+ offset)
	± 500 mA ¹	10 μ A	0.05% + 100 μ A
	± 100 mA	1 μ A	0.05% + 10 μ A
	± 10 mA	100 nA	0.05% + 5 μ A
	± 1 mA	10 nA	0.05% + 500 nA
	± 100 μ A	1nA	0.05% + 50 nA
	± 10 μ A	100 pA	0.05% + 20 nA
Temperature coefficient	$\pm(0.15 \times \text{accuracy})/^{\circ}\text{C}$ (0 $^{\circ}\text{C}$ -18 $^{\circ}\text{C}$,28 $^{\circ}\text{C}$ -50 $^{\circ}\text{C}$)		

1, 500mA range is available only for 6V voltage range



I-V Out capability

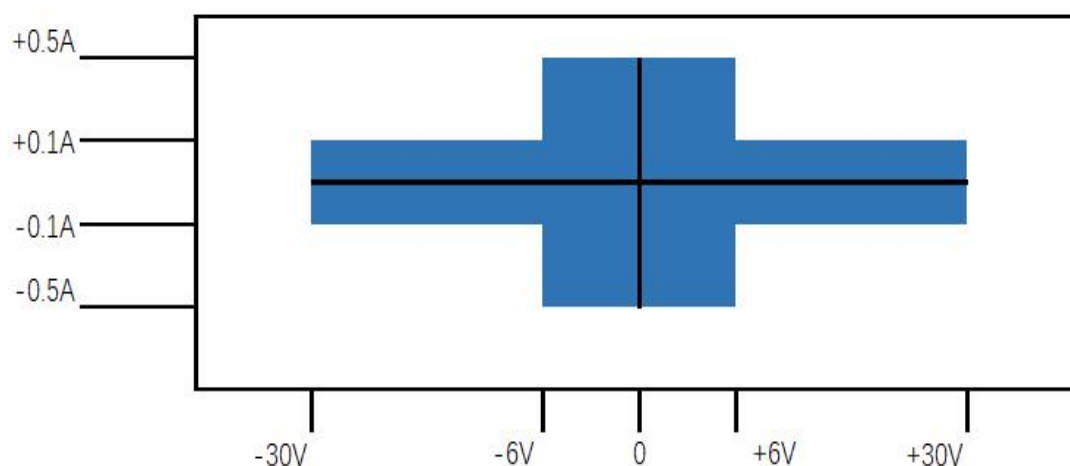

Typical output settling time

Source	Range	Output settling time			Condition
		Fast ^{1,2}	Normal ¹	Slow ¹	
Voltage	30V	<250 μ S	<780 μ S	<2.8ms	Time required to reach within 0.1 % of final value at open load condition. Step is 10 % to 90 % range
	10V	<250 μ S	<780 μ S	<2.8ms	
Current	± 500 mA	<50 μ S	<330 μ S	<2.5ms	Time required to reach within 0.1 % of final value at short condition. Step is 10 % to 90 % range
	± 100 mA	<50 μ S	<270 μ S	<2.5ms	
	± 10 mA	<50 μ S	<270 μ S	<2.5ms	
	± 1 mA	<50 μ S	<290 μ S	<2.5ms	
	± 100 μ A	<50 μ S	<5mS	<2.5ms	
	± 10 μ A	<150 μ S	<3mS	<2.5m	

1, Output transition speed: Fast, Normal, Slow.

2, Slow mode is recommended for overshoot sensitive equipment, Fast mode may have overshoot on output in some condition

Sampling rate and NPLC setting

Setting	Range
NPLC	0.0001PLC ~ 10PLC
Sampling Rate	5sps ~ 500Ksps



Derating accuracy with PLC setting < 1 PLC

Add % of range using the following table for measurement with PLC < 1

PLC	Range			
	6V 、 30V	10uA	100uA 至 100mA	500mA
0.1	0.01%	0.03%	0.01%	0.02
0.01	0.03%	0.06%	0.02%	0.04%
0.001	0.3%	0.4%	0.3%	0.4%

Supplemental characteristics

Sensing Modes	2-wire or 4-wire (Remote-sensing) connections
Maximum sense lead resistance:	1 kΩ for rated accuracy
Max voltage between High Force and High Sense	2V
Maximum output voltage in output connector	>range 105%
Sweep	Sweep step time: from 20uS to 16S, Max:8K point
Auto range	Support, turn off output is recommended for overshoot sensitive equipment before range change
Source delay	Support, It is recommended that users set appropriate source delay to obtain higher accuracy
Over temperature protection	The output will be turned off (also disable operation) when the SMU internal temperature is detected higher than 85 degrees. When the temperature returns to less than 65 degrees, operation recover
Other abnormal protection	Power reset, recover operation or hardware damage

Environmental specifications

Environment	For use in indoor facilities
Operating	0 °C to +50 °C, 30 % to 70 % non-condensing
Storage	-30 °C to 70 °C, 10 % to 90 % non-condensing
Altitude	Operating: 0 m to 2000 m, Storage: 0 m to 4600 m
Warm-up	1 hour

Ordering information

Output connector, quick reference, U disk (including PDF manuals, quick I/V Measurement Software and drivers)

Model number	
S0342C	4-Channel PXIe Precision Source Meter,



Contact us

Mail

Sales sales@semight.com

Technical Support customer_service@semight.com

Address

No. 1508, Xiangjiang Road, Suzhou National New & Hi-Tech Industrial Development Zone (SND)

About Semight Instruments

Semight Instruments is a leading provider of global high-end test instrument and equipment. The company provides products and service to the development, fabrication and service of high-speed communication, optical chip and semiconductor testing fields. Semight's flagship testing instrument includes high-speed bit error ratio tester, network analyzer, broadband sampling oscilloscope, high-precision wavelength meter, optical spectrum analyzer, and digital Source Measure Unit. In addition, the company delivers optoelectronic hybrid ATE, laser chip burn-in system, laser chip tester, silicon photonics wafer tester, power chip tester, wafer level burn-in system, semiconductor parametric test system to domestic and international customers.

Semight Instruments adheres to the customer-centric, employee-based, innovation-driven, and subtle and broad corporate culture, and continues to provide customer trusted, cost-effective and high-performance products and service.

Visit www.semight.com for more information.

*Product specifications and descriptions in this article can be changed without notice