

UC8722C/UC8724C/UC8728C 2/4/8 CHANNEL OPTICAL MULTI-PORT POWER METER

Technical Specifications v3.01
March, 2018



UC8722C/UC8724C/UC8728C 2/4/8 CHANNEL OPTICAL MULTIPOINT POWER METER

UC INSTRUMENTS UC8722C/UC8724C/UC8728C 2/4/8 CHANNEL OPTICAL MULTIPORT POWER METER are PC control multipoint passive components power meter test system and offer superior performance for the test of multi-channel DWDM, WSS, ROADM, AWG & PLC components and modules, optical amplifiers, DWDM system and other general purpose of multipoint fiber optical test and measurement applications. The system can be integrated with tunable laser source, optical attenuator & PDL controller provides a high performance passive components and modules automatic test system platform.

Features

- 2, 4, 8 channel optional
- High dynamic range
- High speed data acquisition and fast data transfer to computer
- High channel test in one click
- Save space and easy connect with computer with USB/RS232 cable



Applications

- Production PLC, AWG, WSS, ROADM multipoint components and modules testing
- Fiber Grating Sensor testing
- PMD and PDL measurement
- Fiber Optical , Telcom R & D lab test
- It is easy to be integrated into a passive fiber components testing system

Specifications

Model #	UC8722C	UC8724C	UC8728C
<i>Channel Number</i>	2 Channels	4 Channels	8 Channels
<i>Wavelength Range</i>	850 ~ 1700 nm		
<i>Power Range</i>	+ 5.0 ~ -75 dBm		
<i>Sampling Speed</i>	10 us (100KHz)		
<i>Application Fiber Type</i>	Standard SM and MM up to 62.5 um core size		
<i>Calibration Wavelength</i>	850, 980, 1300, 1310, 1490, 1550, 1625		
<i>Uncertainty (accuracy) at reference condition</i>	+/- 4% (1200 nm ~ 1610 nm)		
<i>Relative Uncertainty (accuracy) at reference condition</i>	< 0.04 dB Typical		
<i>Linearity (power)</i>	<= +/- 0.06 dB (1200 nm ~ 1610 nm, + 0~ -60 dBm)		
<i>Return Loss</i>	> 40 dB		
<i>Operation Temperature</i>	0 ~ +40°C		
<i>Storage Temperature</i>	-30 ~ +80°C		
<i>Recalibration Period</i>	2 years		
<i>Power Adaptor Power</i>	AC 100 - 240 V ± 10%, 48 - 66 Hz, 100 VA max.		
<i>Display</i>	PC Interface.		
<i>Communication Port</i>	USB and RS232		
<i>Work Environmental</i>	-10°C to +70°C 0°C to +45°C <95% R.H. from 0°C to +45°C		
<i>Dimensions</i>	235mm W×45mm H×310mmD		
<i>Weight</i>	10.0 lbs		

UC8722C/UC8724C/UC8728C 2/4/8 CHANNEL OPTICAL MULTIPOINT POWER METER SYSTEM

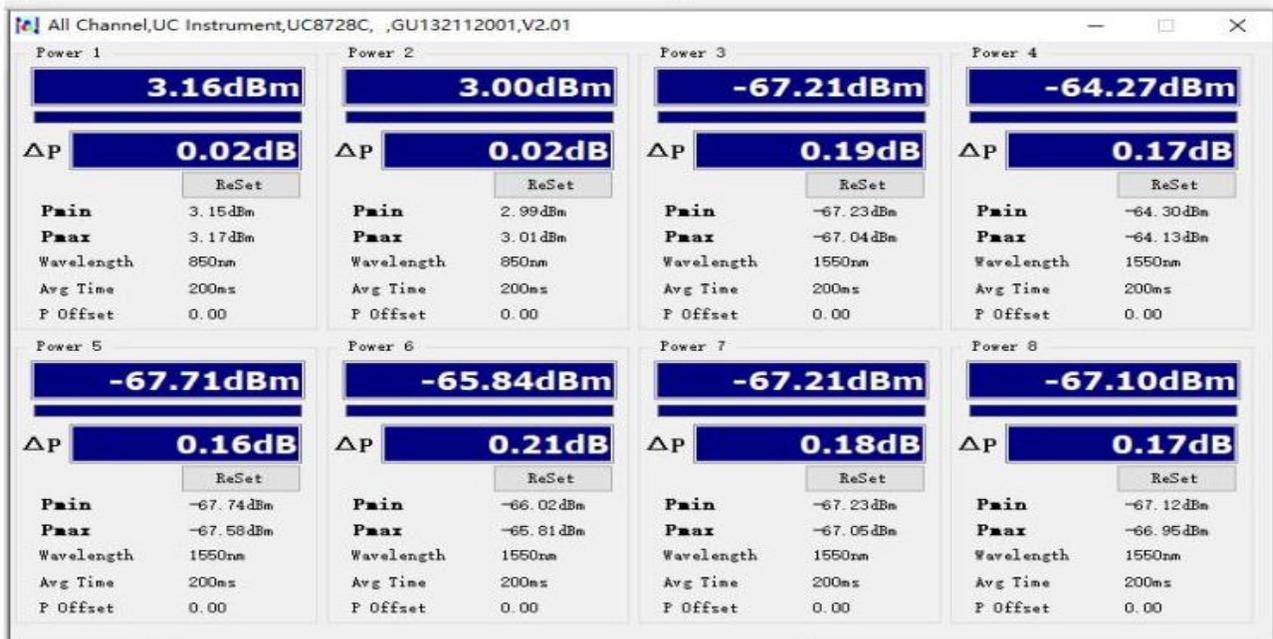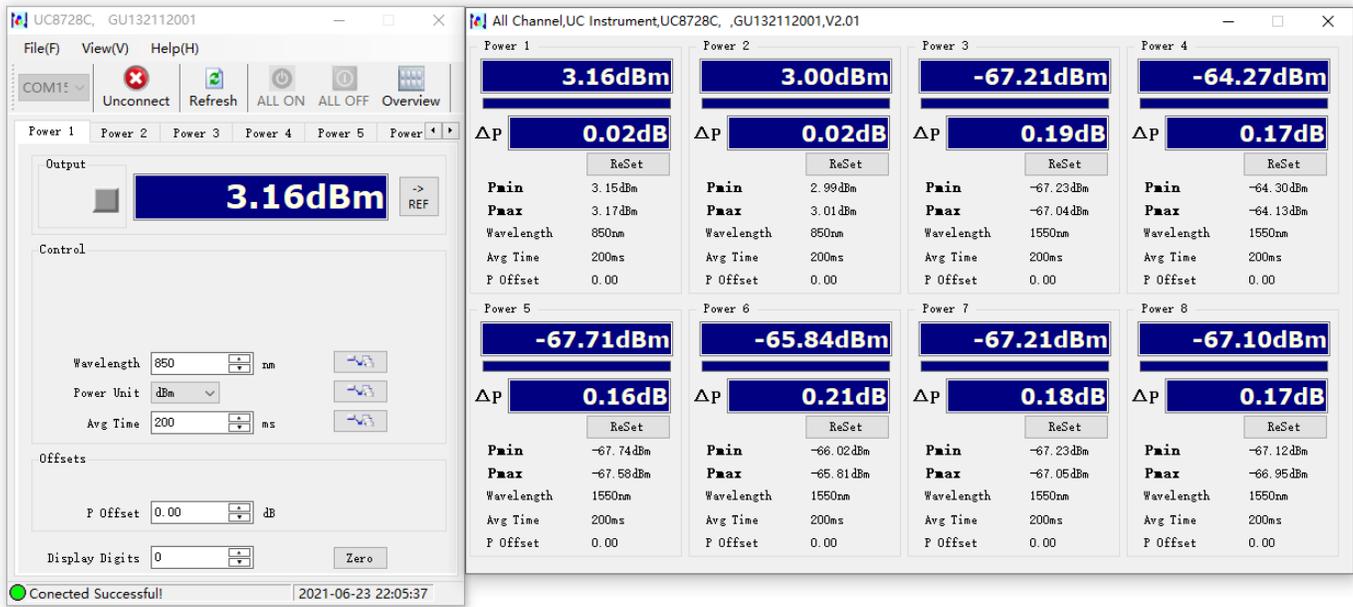

COMPUTER GUI

UC INSTRUMENTS' Test and Measurement Support

Contact Information

United States:

UC INSTRUMENTS CORP.

3652 Edison Way
Fremont, CA 94538
USA

Tel: 1-510-366-7353

Fax: 1-510-353-1809

www.ucinstruments.com

Product specifications and descriptions in this documentation subject to change without notice.

Copyright © 2008 UC INSTRUMENTS CORP.

May, 2018

31000040 V3.01