


L-SMA-M-18G

SMA Plug 50ohm Termination
18GHz 30dB

50Ω

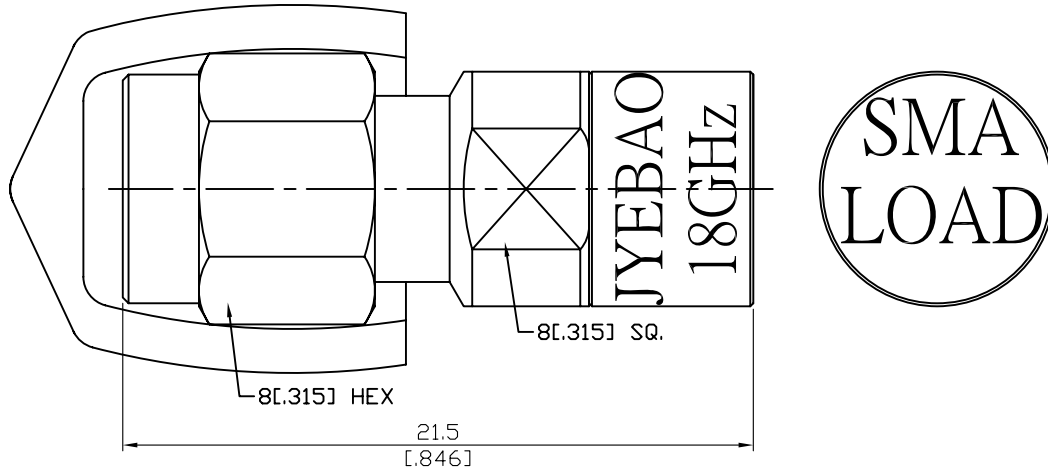

| LOAD | | |
|-----------------|----------|--------|
| FREQUENCY RANGE | DC-18GHz | |
| IMPEDANCE | 50Ω | |
| DC RESISTANCE | 50±0.50Ω | |
| MAX POWER | 0.25W | |
| RETURN LOSS | DC-6GHz | ≥ 42dB |
| | 6-18GHz | ≥ 30dB |

Notes:

1. Temperature range for optimal results: +20 °C to +26 °C
2. Storage temperature range: -20 °C to +75°C
3. When not in use put on cap to keep connector clean
4. Return loss test results shipped along with goods

| Parts | Material | Plating (Micro-inch) |
|---------------|------------------|---|
| Cover | Aluminium | Anodized(Green) |
| Retainer Ring | Beryllium Copper | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Gasket | Silicone | |
| Nut | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Contact Pin | Beryllium Copper | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Insulator | Teflon | |
| Body | Stainless Steel | Passivated |
| Coupling Nut | Stainless Steel | Passivated |
| Cap | PVC | |

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.