


TH-3.5-MM-26.5G

3.5mm Plug to 3.5mm Plug
Phase Matched Through (Thru)Adaptor
26.5GHz 26dB

50Ω

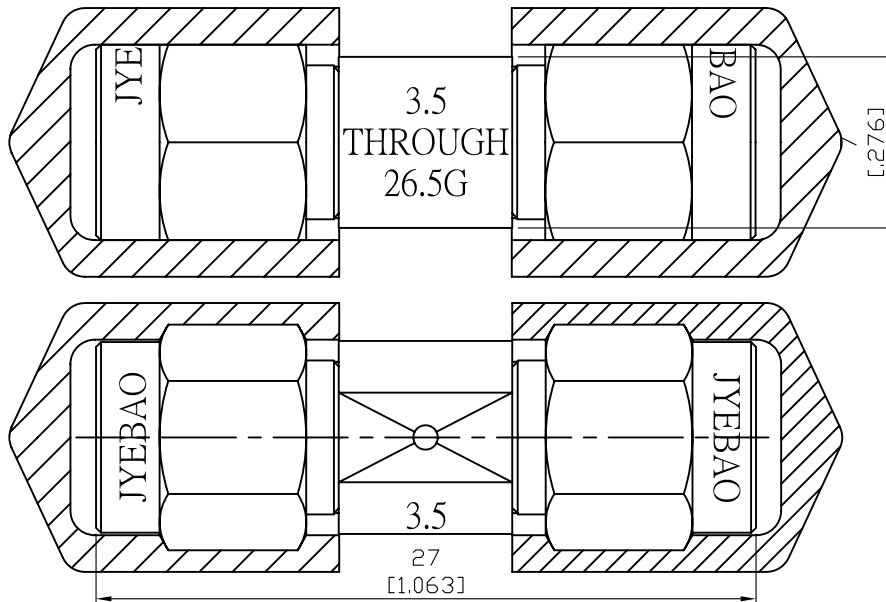

Through (Thru) Adaptor		
Frequency Range		DC-26.5GHz
Impedance		50Ω
Insertion Loss		≤ 0.2dB
Electrical Length		20.844+/-0.12mm
Return Loss	DC-8GHz	≥ 30dB
	8-18GHz	≥ 28dB
	18-26.5GHz	≥ 26dB

Notes:

1. Temperature range for optimal results: +20 °C to +26 °C
2. Storage temperature range: -20 °C to +75°C
3. When not in use put on cap to keep connectors clean
4. Return loss test results shipped along with goods

Parts	Material	Plating (Micro-inch)
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PPO	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated
Cap	PVC	

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.