


TH-SMA-MM-6G

SMA Plug to SMA Plug Phase Matched Adaptor  
6GHz 32dB

50Ω

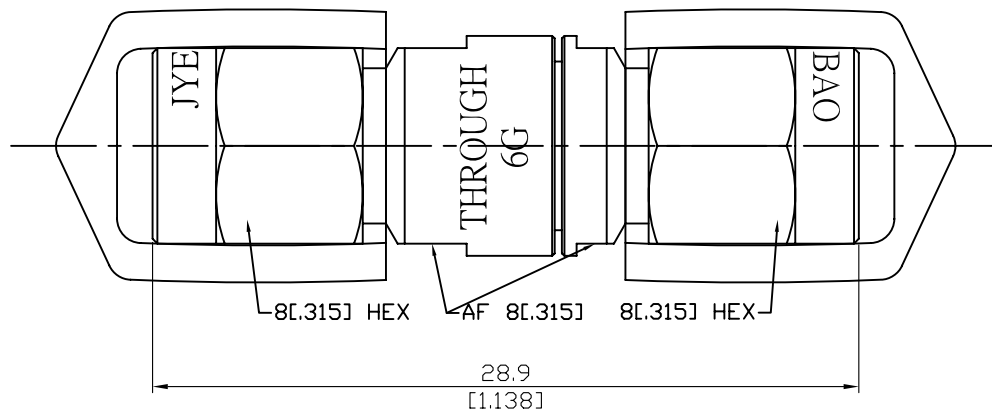

THROUGH ADAPTOR		
FREQUENCY RANGE		DC-6GHz
IMPEDANCE		50Ω
INSERTION LOSS		≤ 0.15dB
ELECTRICAL LENGTH (mm)		27.713±0.12
RETURN LOSS	DC-6GHz	≥ 32dB

Notes:

1. Temperature range for optimal results: +20 °C to +26 °C
2. Storage temperature range: -20 °C to +75°C
3. When not in use put on cap to keep connector clean
4. Return loss test results shipped along with goods

Parts	Material	Plating ( Micro-inch )
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated
Cap	PVC	

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.